



SKU: # EVO274



27" Evolution Multi-Touch LED Touch Screen

Touch Screen Performance (Evolution-Touch)

- Superior High-Performance Projected Capacitive (Unlimited Touch Activations)
- 10 Point Multi-Touch (Finger, Capacitive Stylus, Nitrile, Latex and Vinyl Gloves)
- USB HID compliant & Driver free with no calibration
- Ultra Fast Precision Touch Response
- Requires human intentional touch (HIT)
- Anti-Fingerprint Oleophobic nano-coating
- Anti-Glare Diffuses mirror-like reflection
- Noise Immunity (Advanced technology to eliminate wide band and narrow band interference)
- 3mm thick, sealed full glass display
- Touch operation is unaffected by surface contaminants



Applications

- Mission Critical
- Industrial
- Nurse Stations
- ERP
- Retail

Certifications

- 60601-1
- IPX2
- IP34

Display Performance

- Medical "A" Grade LCD Panel/ 16:9
- Edge-to-Edge sealed 3mm glass surface
- Integrated Multi-Media Speakers
- Industrial Cooling
- America's Best Commercial Warranty 4 Years with advanced replacement
- Proprietary CFD Designed Ventilation
- Custom vent system to limit dust collection and prevent fluid intrusion
- (MTBF) 124,000 Hours
- HDMI (HDCP Compatible) input provides expanded connectivity with advanced technology
- VESA compliant
- Locking power supply connection
- Made in the USA



Designed and Manufactured by Tech Global, Inc. in Chicago, IL

SPECIFICATIONS

Touch Interface

Touch Response

Evolution-Touch (PCT/ Anti-Fingerprint/ Anti-Glare): USB/ HID Compliant

5ms

Display

Viewable Image Size

24/7 Medical "A" Grade Display/ Edge-Lit LED LCD

27"/ 16:9

Mean Time Between Failure (MTBF)

124,000 Hours

Pixel Pitch

0.25mm

Pixels Per Inch

102 @ native resolution

Brightness

250 cd/m2

Contrast Ratio

3000:1

Viewing Angle

178° Vert., 178° Hor.

Response Time

LCD Rapid Response (25ms)

Synchronization Range

Horizontal

31.5 kHz to 81.1 kHz (Analog/Digital)

Vertical

56 to 76 Hz

Internal Speakers

Audio

Built-in multimedia speakers provide quality sound

In (1)

Input Signal

Video

ANALOG 0.7 Vp-p/75 Ohms

Sync

TTL Level (Positive/Negative)

Input Connectors

DisplayPort, HDMI and DVI

Native Resolution

1920 x 1080 HD @ 60 Hz

Power Consumption

On

29W/ Power Savings Mode .6W/

Dimensions (WxHxD)

Net (with stand)

25.8 x 15.7 x 8.1 in.

Net (without stand)

25.8 x 15.7 x 1.7 in.

Net Weight (with stand)

TBD lbs.

VESA Hole Configuration Specification

100 x 100mm/ 200 X 200mm

Environmental Conditions

Operating Temperature

5-35C/41-95F

Operating Humidity

20-80%

Operating Altitude

2000m / 6562 ft.

Storage Temperature

-10-60C/14-140F

Storage Humidity

10-85%

Storage Altitude

12,192m/40,000 ft.


Warranty

4 years parts and labor including backlight and touch components



TechGlobal



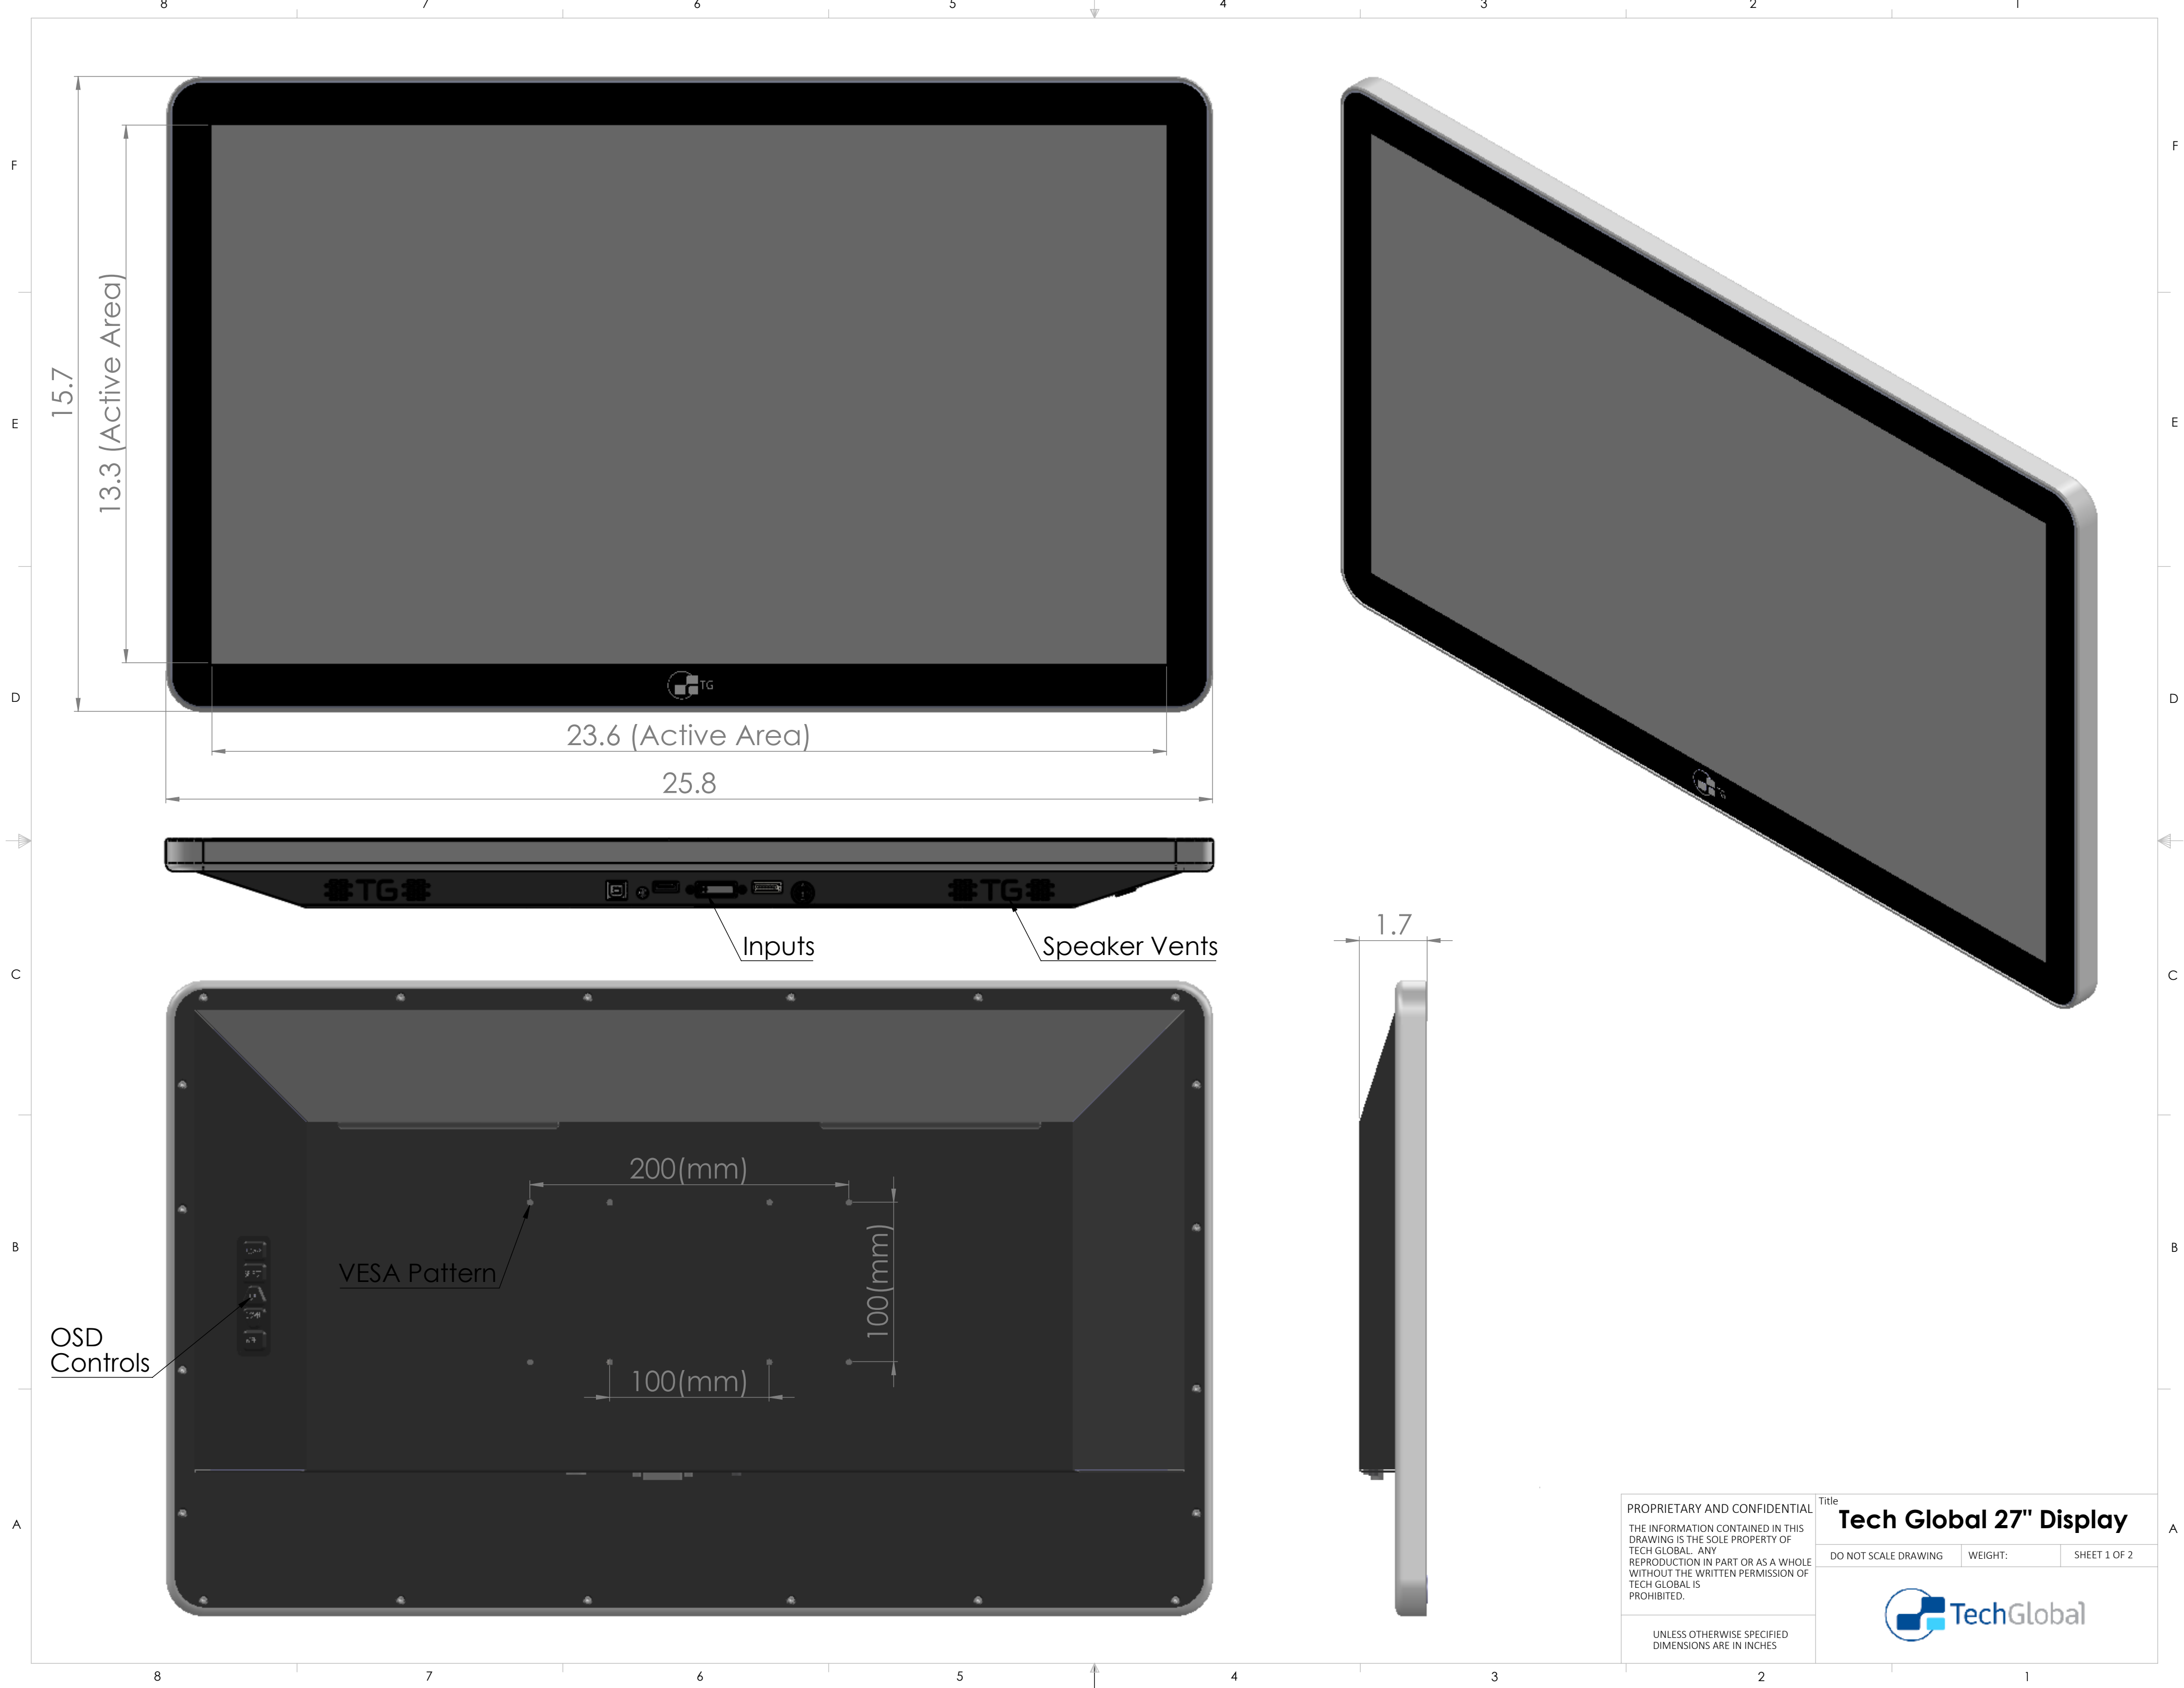

15.7
13.3 (Active Area)

23.6 (Active Area)
25.8

Inputs Speaker Vents

1.7

OSD Controls

VESA Pattern

200(mm)
100(mm)
100(mm)



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
TECH GLOBAL. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
TECH GLOBAL IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES


Title
Tech Global 27" Display

DO NOT SCALE DRAWING WEIGHT: SHEET 1 OF 2



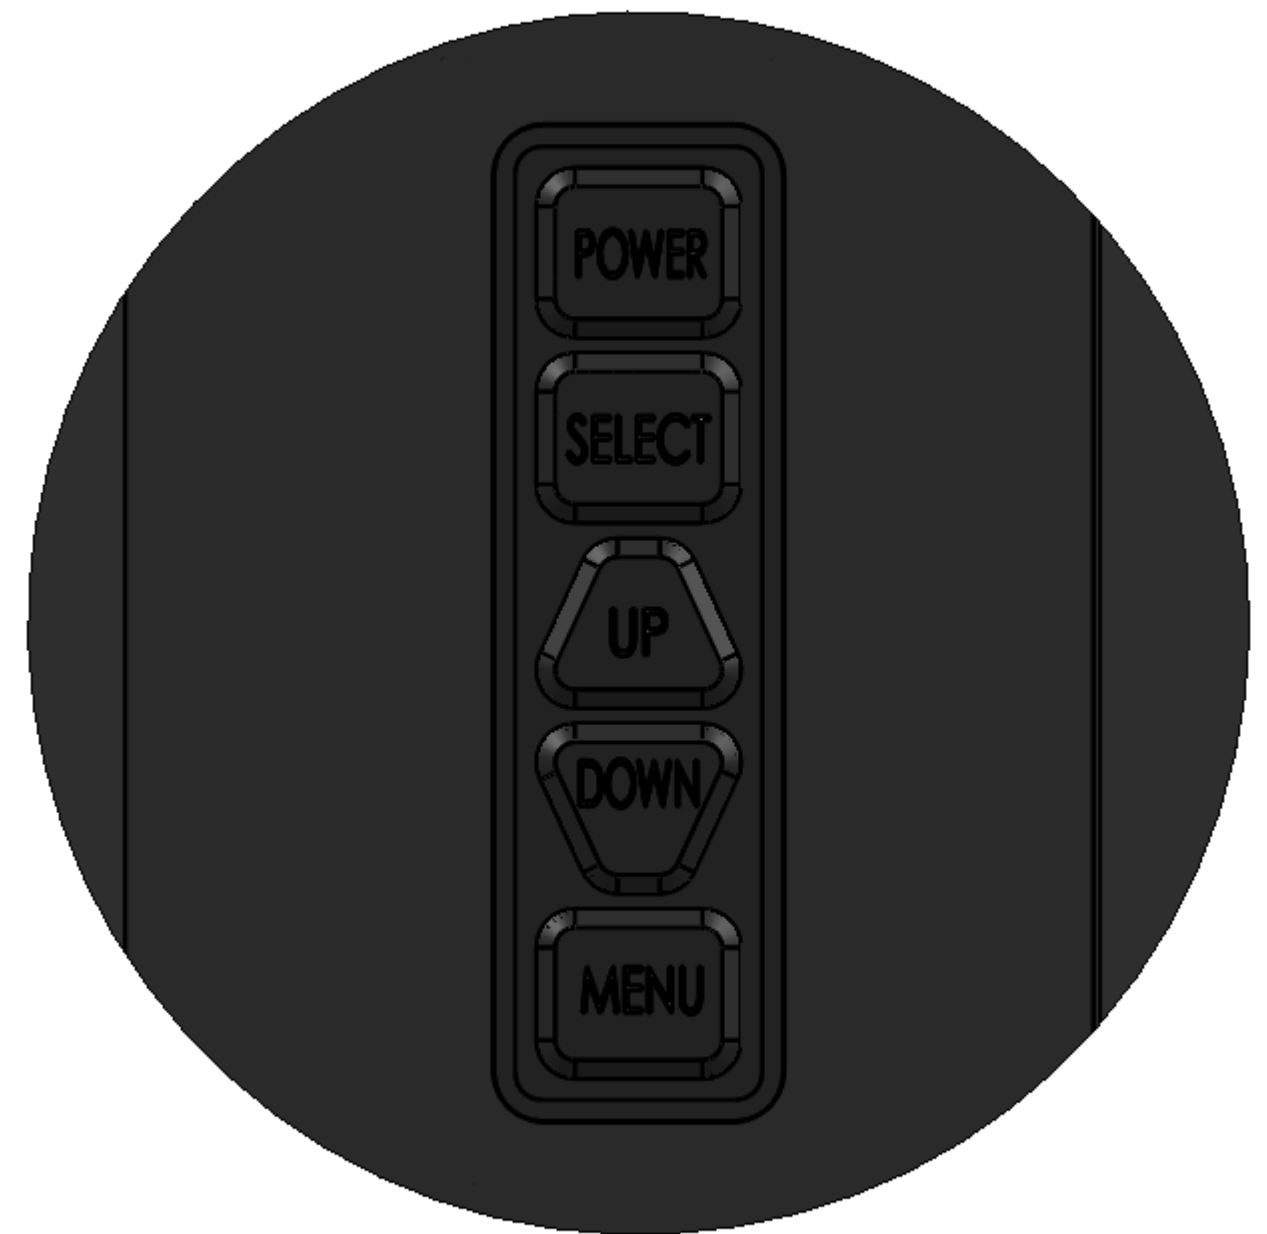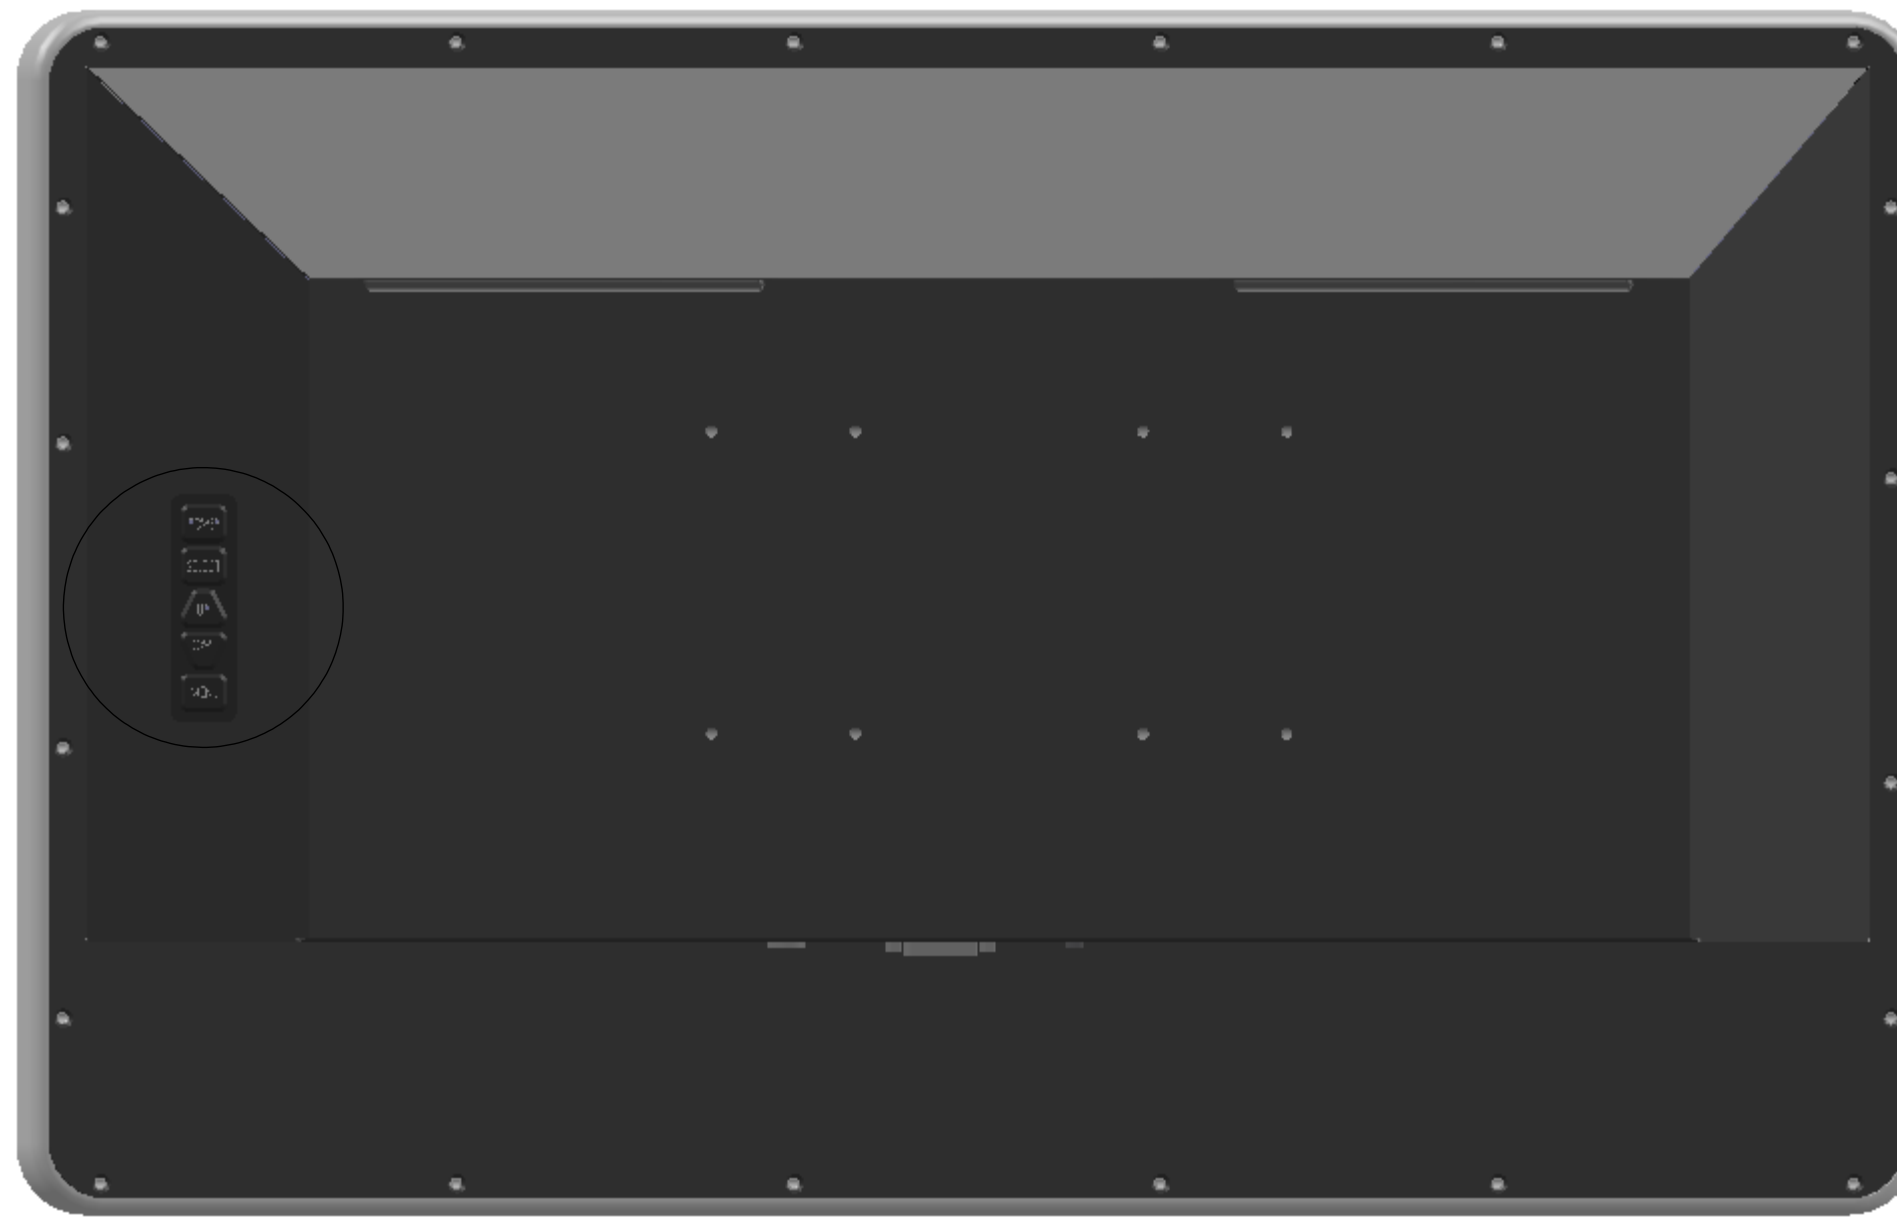

OSD Controls

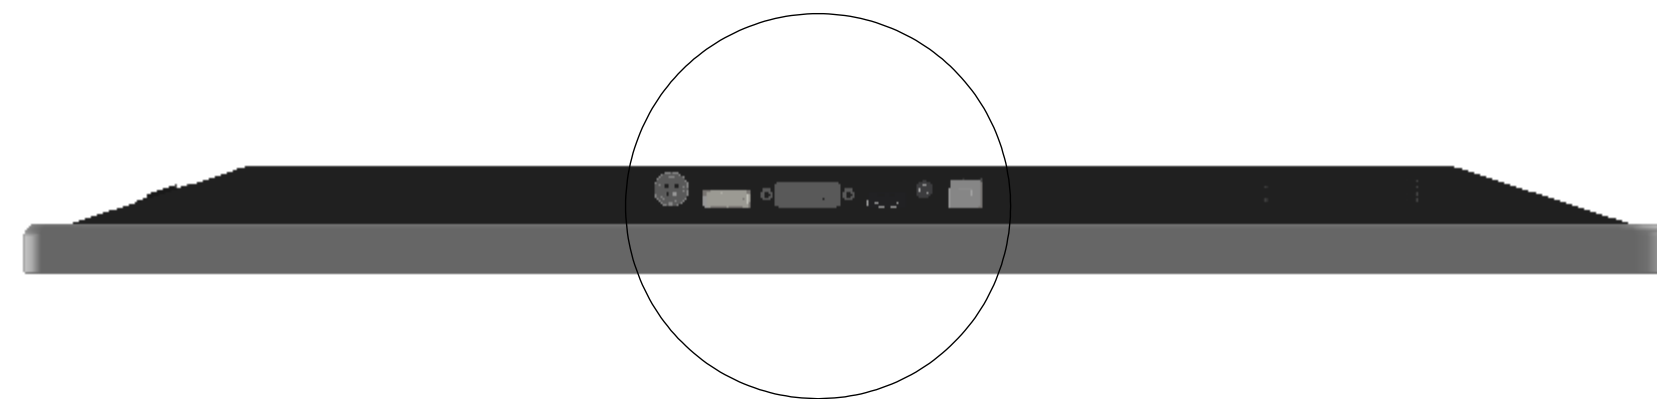

Inputs: DC Power, Display Port, DVI, HDMI, Audio In, USB Type B*
(As Seen Left To Right)

*Touch Model Only

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TECH GLOBAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TECH GLOBAL IS PROHIBITED.	Title Tech Global 27" Display	
	DO NOT SCALE DRAWING	WEIGHT:
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		