



**CDC Cleaning** 

# 27" UHD Evolution Multi-Touch LED Touch Screen

**Antibacterial** 

### Touch Screen Performance (Evolution-Touch)

 Superior High-Performance Projected Capacitive (Unlimited Touch Activations)

Anti-fingerprint

- 10 Point Multi-Touch (Finger, Capacitive Stylus, Nitrile, Latex and Vinyl Gloves)
- USB HID compliant & Driver free with no calibration
- Ultra Fast Precision Touch Response
- Requires human intentional touch (HIT)
- Anti-Fingerprint Oleophobic nano-coating
- Noise Immunity (Advanced technology to eliminate wide band and narrow band interference)
- · 3mm thick, sealed full glass display
- Touch operation is unaffected by surface contaminants

### **Applications**

- Surgical
- Nurse Stations
- Industrial

**Medical Grade** 

- 60601-1

## Certifications

- · IPX2
- IP34













Designed and Manufactured by Tech Global, Inc. in Chicago, IL

### **Display Performance**

- Medical "A" Grade LCD Panel/ 16:9
- · Edge-to-Edge sealed 3mm glass surface
- Integrated Multi-Media Speakers
- Industrial Cooling
- · America's Best Commercial Warranty 4 Years with advanced replacement

Ingress

**Protection** 

Made in USA

- Proprietary CFD Designed Ventilation
- · Custom vent system to limit dust collection and prevent fluid intrusion
- (MTBF) 124,000 Hours
- HDMI 2.0 (HDCP Compatible) input provides expanded connectivity with advanced technology
- VESA compliant
- Locking power supply connection
- Made in the USA

# **SPECIFICATIONS**

Touch Interface Evolution-Touch (PCT/ Anti-Fingerprint/ Anti-Glare): USB/ HID Compliant

Touch Response 5ms

**Display** 24/7 Medical "A" Grade Display/ Edge-Lit LED LCD

Viewable Image Size 27"/ 16:9

Mean Time Between Failure (MTBF) 124,000 Hours

Pixel Pitch 0.1554mm

Color Depth 1.07 Billion colors, 10Bit

Brightness 350 cd/m2
Contrast Ratio 3000:1

Ultra HD Resolution 3840 x 2160 (4K)

Viewing Angle 178° Vert., 178° Hor.

Response Time LCD Rapid Response (25ms)

Internal Speakers Built-in multimedia speakers provide quality sound

**Input Signal** 

Input Connectors DisplayPort, HDMI and DVI

Audio In (1)

**Power Consumption** 

**Dimensions (WxHxD)** 

On 29W/ Power Savings Mode .6W/

Net (with stand) 25.8 x 15.7 x 8.1 in.

Net (without stand) 25.8 x 15.7 x 1.7 in.

Net Weight (with stand) 24 lbs.

Net Weight (without stand) 20 lbs.

VESA Hole Configuration Specification 100 x 100mm/ 200 X 100mm

**Environmental Conditions** 

Operating Temperature 5-35C/41-95F Operating Humidity 20-80%

Operating Altitude 2000m / 6562 ft. Storage Temperature -10-60C/14-140F


Storage Humidity 10-85%


Storage Altitude 12,192m/40,000 ft.

**Warranty** 4 years parts and labor including backlight and touch components






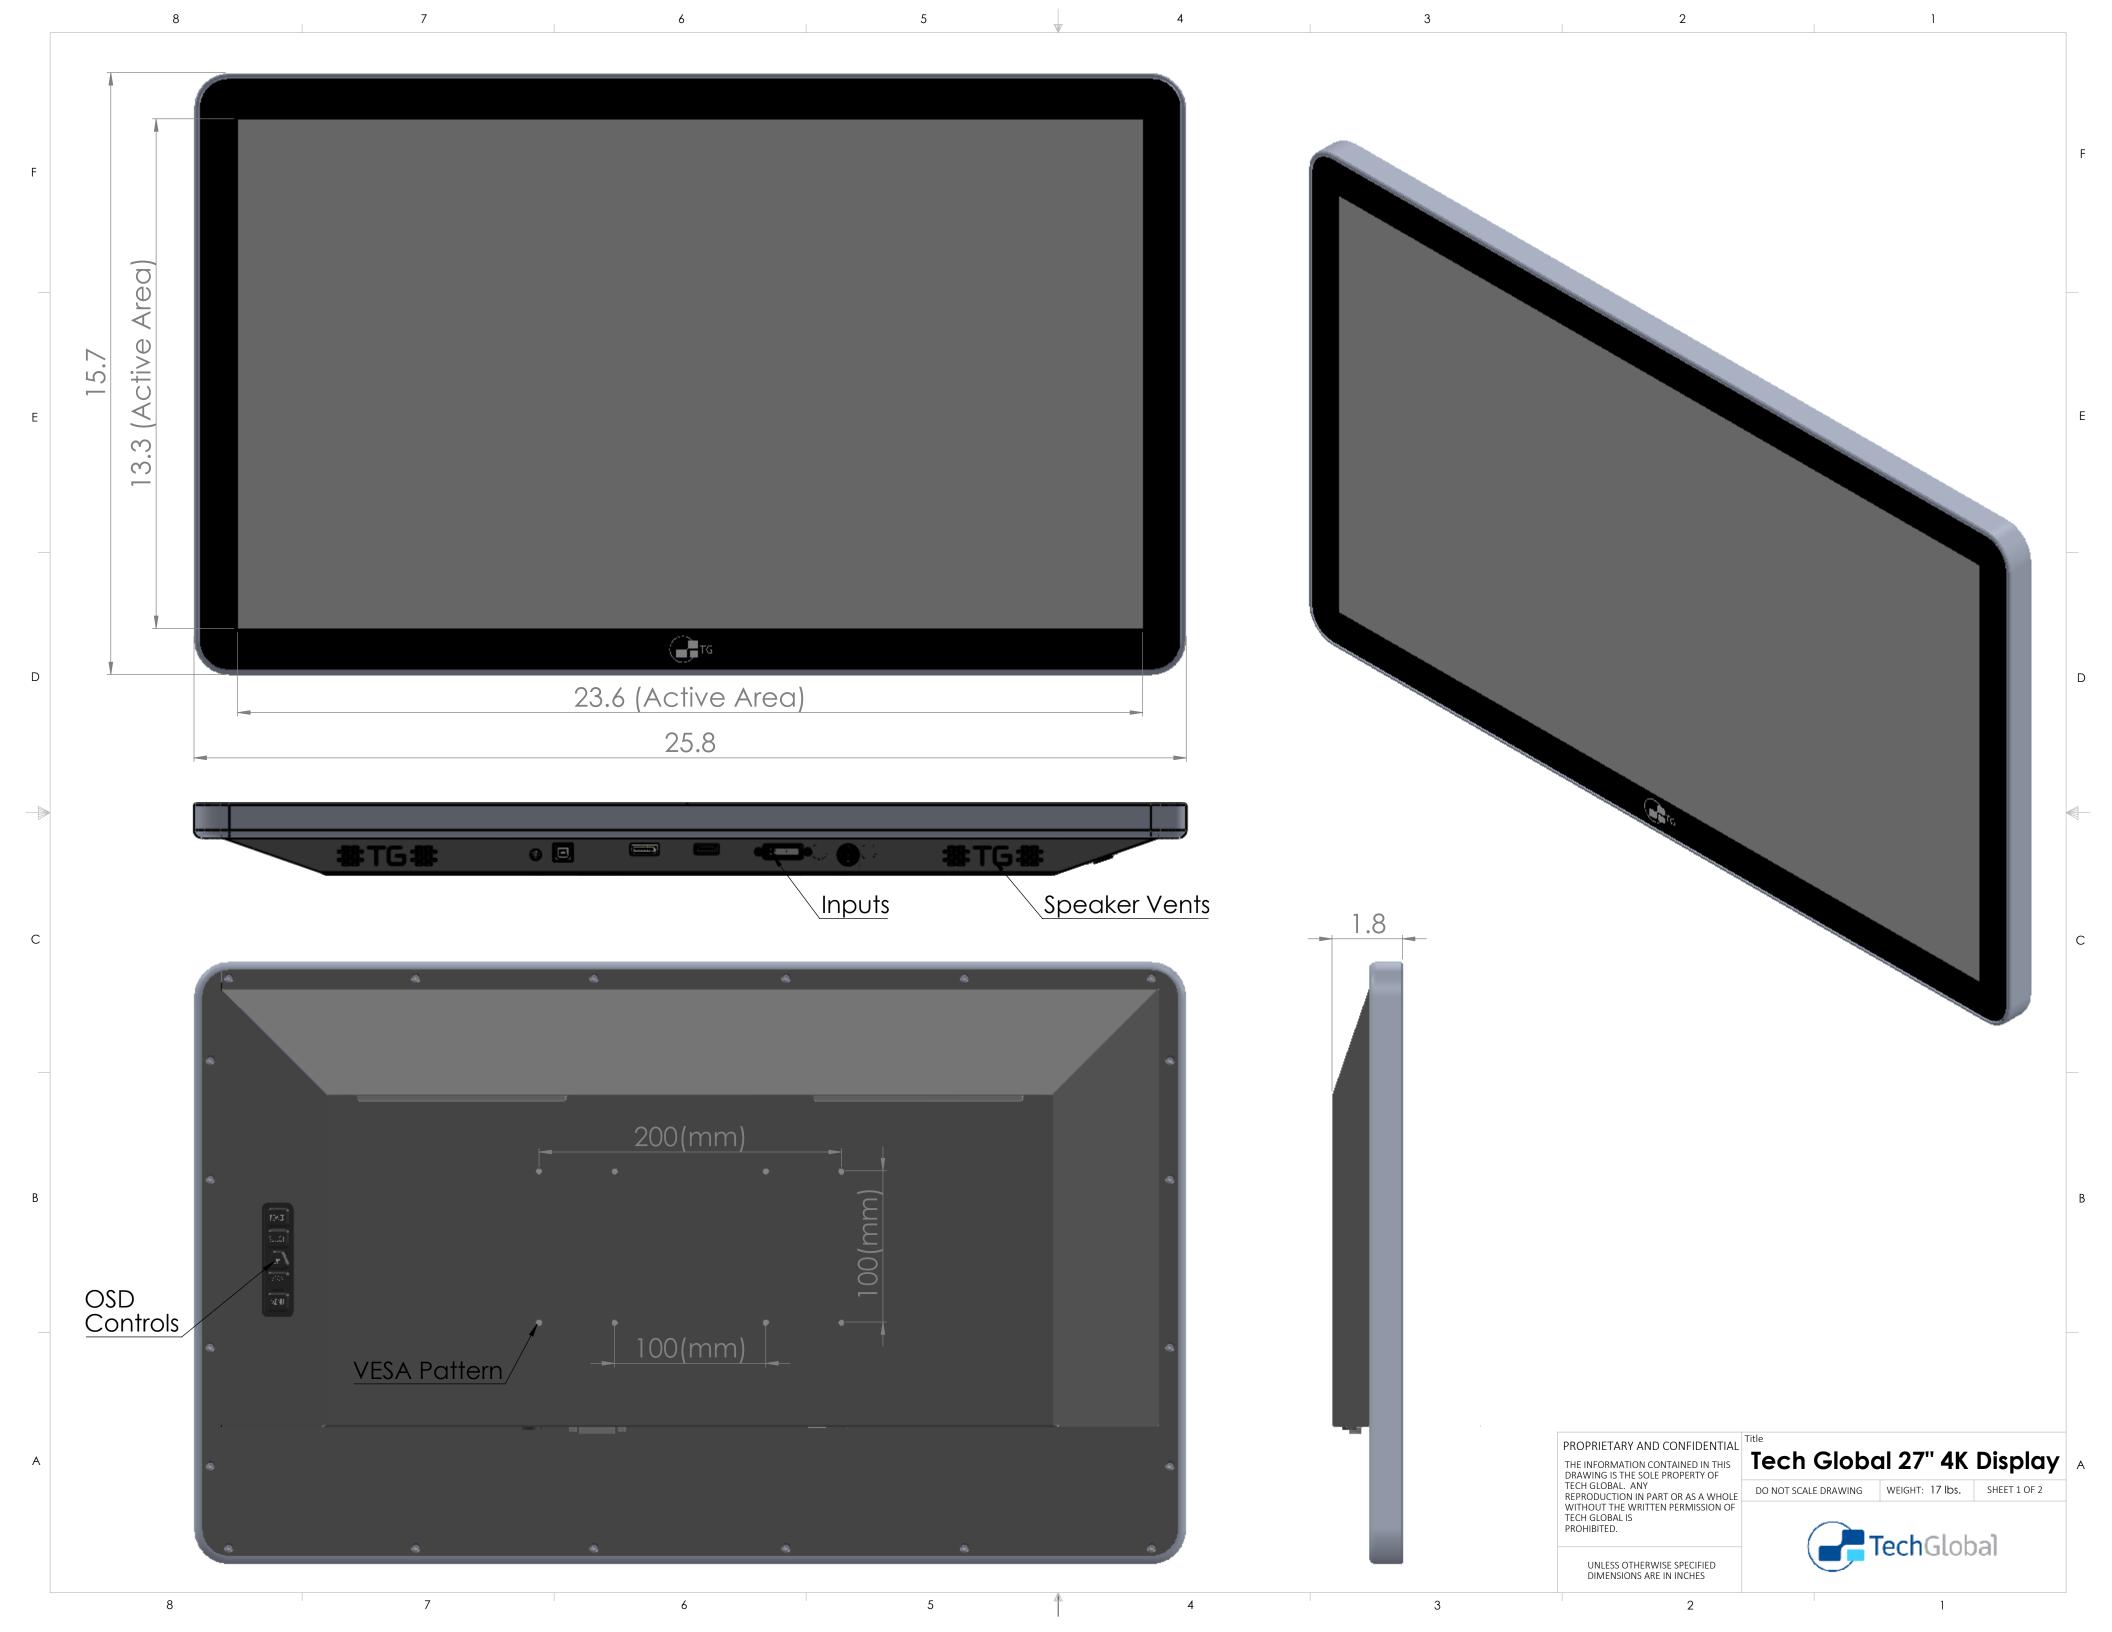

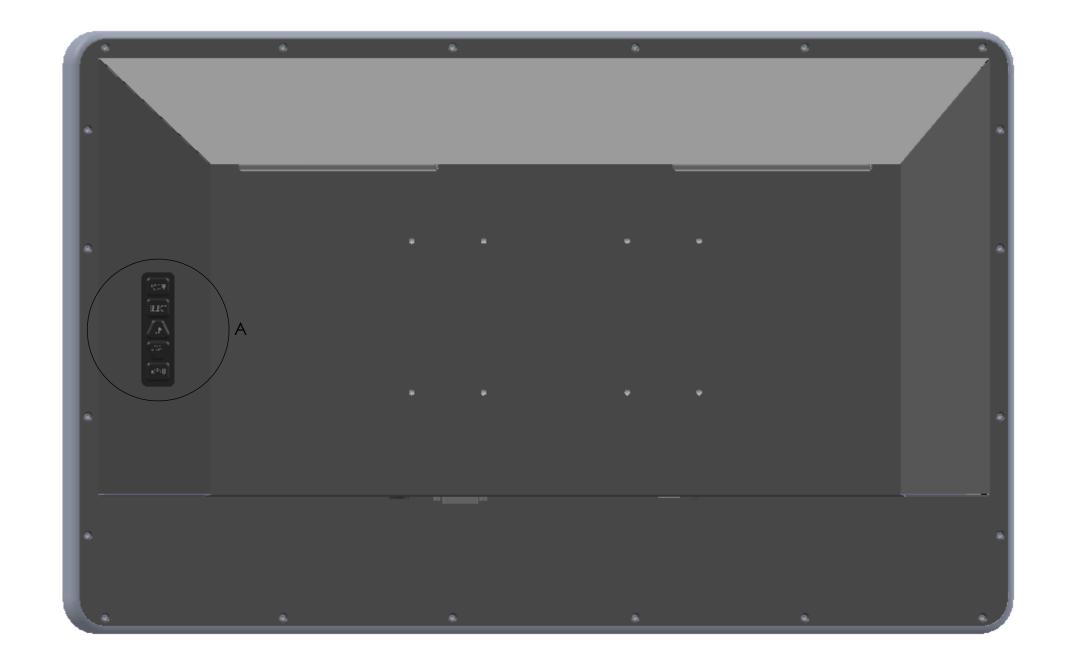


5

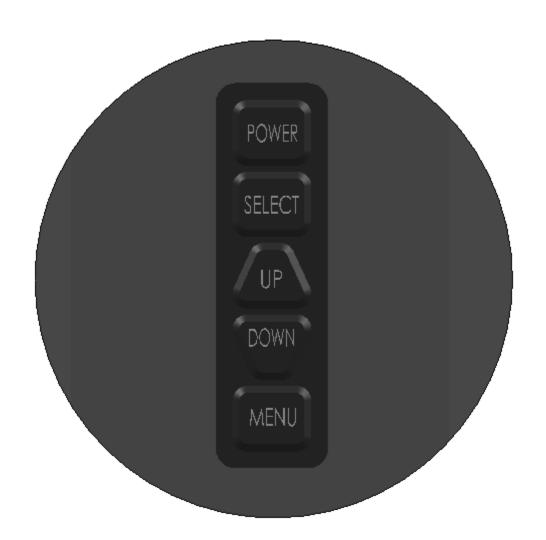

2

**OSD Controls** 

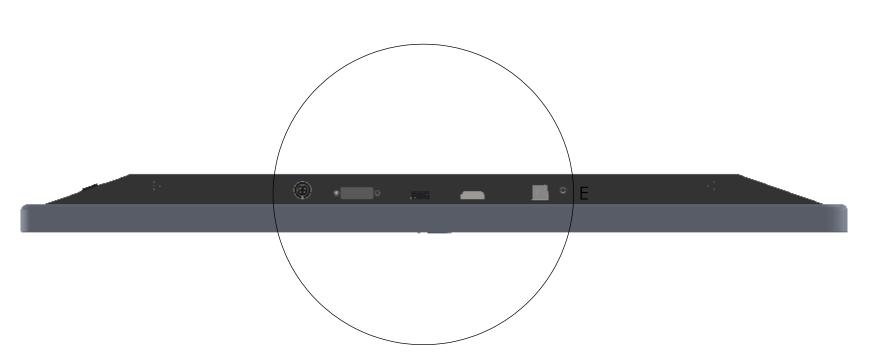



Inputs: DC Power, DVI, HDMI, Display Port, USB Type B\*, Audio In (As Seen Left To Right)

\*Touch Model Only

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TECH GLOBAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TECH GLOBAL IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

Tech Global 27" 4K Display A DO NOT SCALE DRAWING WEIGHT: 17 lbs. SHEET 2 OF 2

2

7

6

5

3

3