















# 27" Evolution Multi-Touch LED Touch Screen

#### **Touch Screen Performance (Evolution-Touch)**

- Superior High-Performance Projected Capacitive (Unlimited Touch Activations)
- 10 Point Multi-Touch (Finger, Capacitive Stylus, Nitrile, Latex and Vinyl Gloves)
- · USB HID compliant & Driver free with no calibration
- · Ultra Fast Precision Touch Response
- Requires human intentional touch (HIT)
- Anti-Fingerprint Oleophobic nano-coating
- · Anti-Glare Diffuses mirror-like reflection
- Noise Immunity (Advanced technology to eliminate wide band and narrow band interference)
- · 3mm thick, sealed full glass display
- Touch operation is unaffected by surface contaminants

#### **Applications**

- Mission Critical
- Industrial
- Nurse Stations
- ERP
- Retail

#### Certifications

- 60601-1
- IPX2
- IP34

### **Display Performance**

- Medical "A" Grade LCD Panel/ 16:9
- Edge-to-Edge sealed 3mm glass surface
- Integrated Multi-Media Speakers
- Industrial Cooling
- America's Best Commercial Warranty 4 Years with advanced replacement
- Proprietary CFD Designed Ventilation
- Custom vent system to limit dust collection and prevent fluid intrusion
- (MTBF) 124,000 Hours
- HDMI (HDCP Compatible) input provides expanded connectivity with advanced technology
- VESA compliant
- · Locking power supply connection
- · Made in the USA













Designed and Manufactured by Tech Global, Inc. in Chicago, IL

## **SPECIFICATIONS**

**Touch Interface** Evolution-Touch (PCT/ Anti-Fingerprint/ Anti-Glare): USB/ HID Compliant

Touch Response 5ms

**Display** 24/7 Medical "A" Grade Display/ Edge-Lit LED LCD

Viewable Image Size 27"/16:9 Mean Time Between Failure (MTBF) 124,000 Hours Pixel Pitch 0.25mm

Pixels Per Inch 102 @ native resolution

Brightness 250 cd/m2 Contrast Ratio 3000:1

178° Vert., 178° Hor. Viewing Angle

Response Time LCD Rapid Response (25ms)

**Internal Speakers** Built-in multimedia speakers provide quality sound

Audio In (1)

**Input Signal** 

Input Connectors DisplayPort, HDMI and DVI Native Resolution 1920 x 1080 HD @ 60 Hz

**Power Consumption** 

29W/ Power Savings Mode .6W/

**Dimensions (WxHxD)** Net (with stand) 25.8 x 15.7 x 8.1 in.

Net (without stand) 25.8 x 15.7 x 1.7 in.

24 lbs. Net Weight (with stand) Net Weight (without stand) 20 lbs.

VESA Hole Configuration Specification 100 x 100mm/ 200 X 100mm

**Environmental Conditions** 

Operating Temperature 5-35C/41-95F Operating Humidity 20-80% Operating Altitude 2000m / 6562 ft.

Storage Temperature -10-60C/14-140F

Storage Humidity 10-85%

Storage Altitude 12,192m/40,000 ft.

Warranty 4 years parts and labor including backlight and touch components


















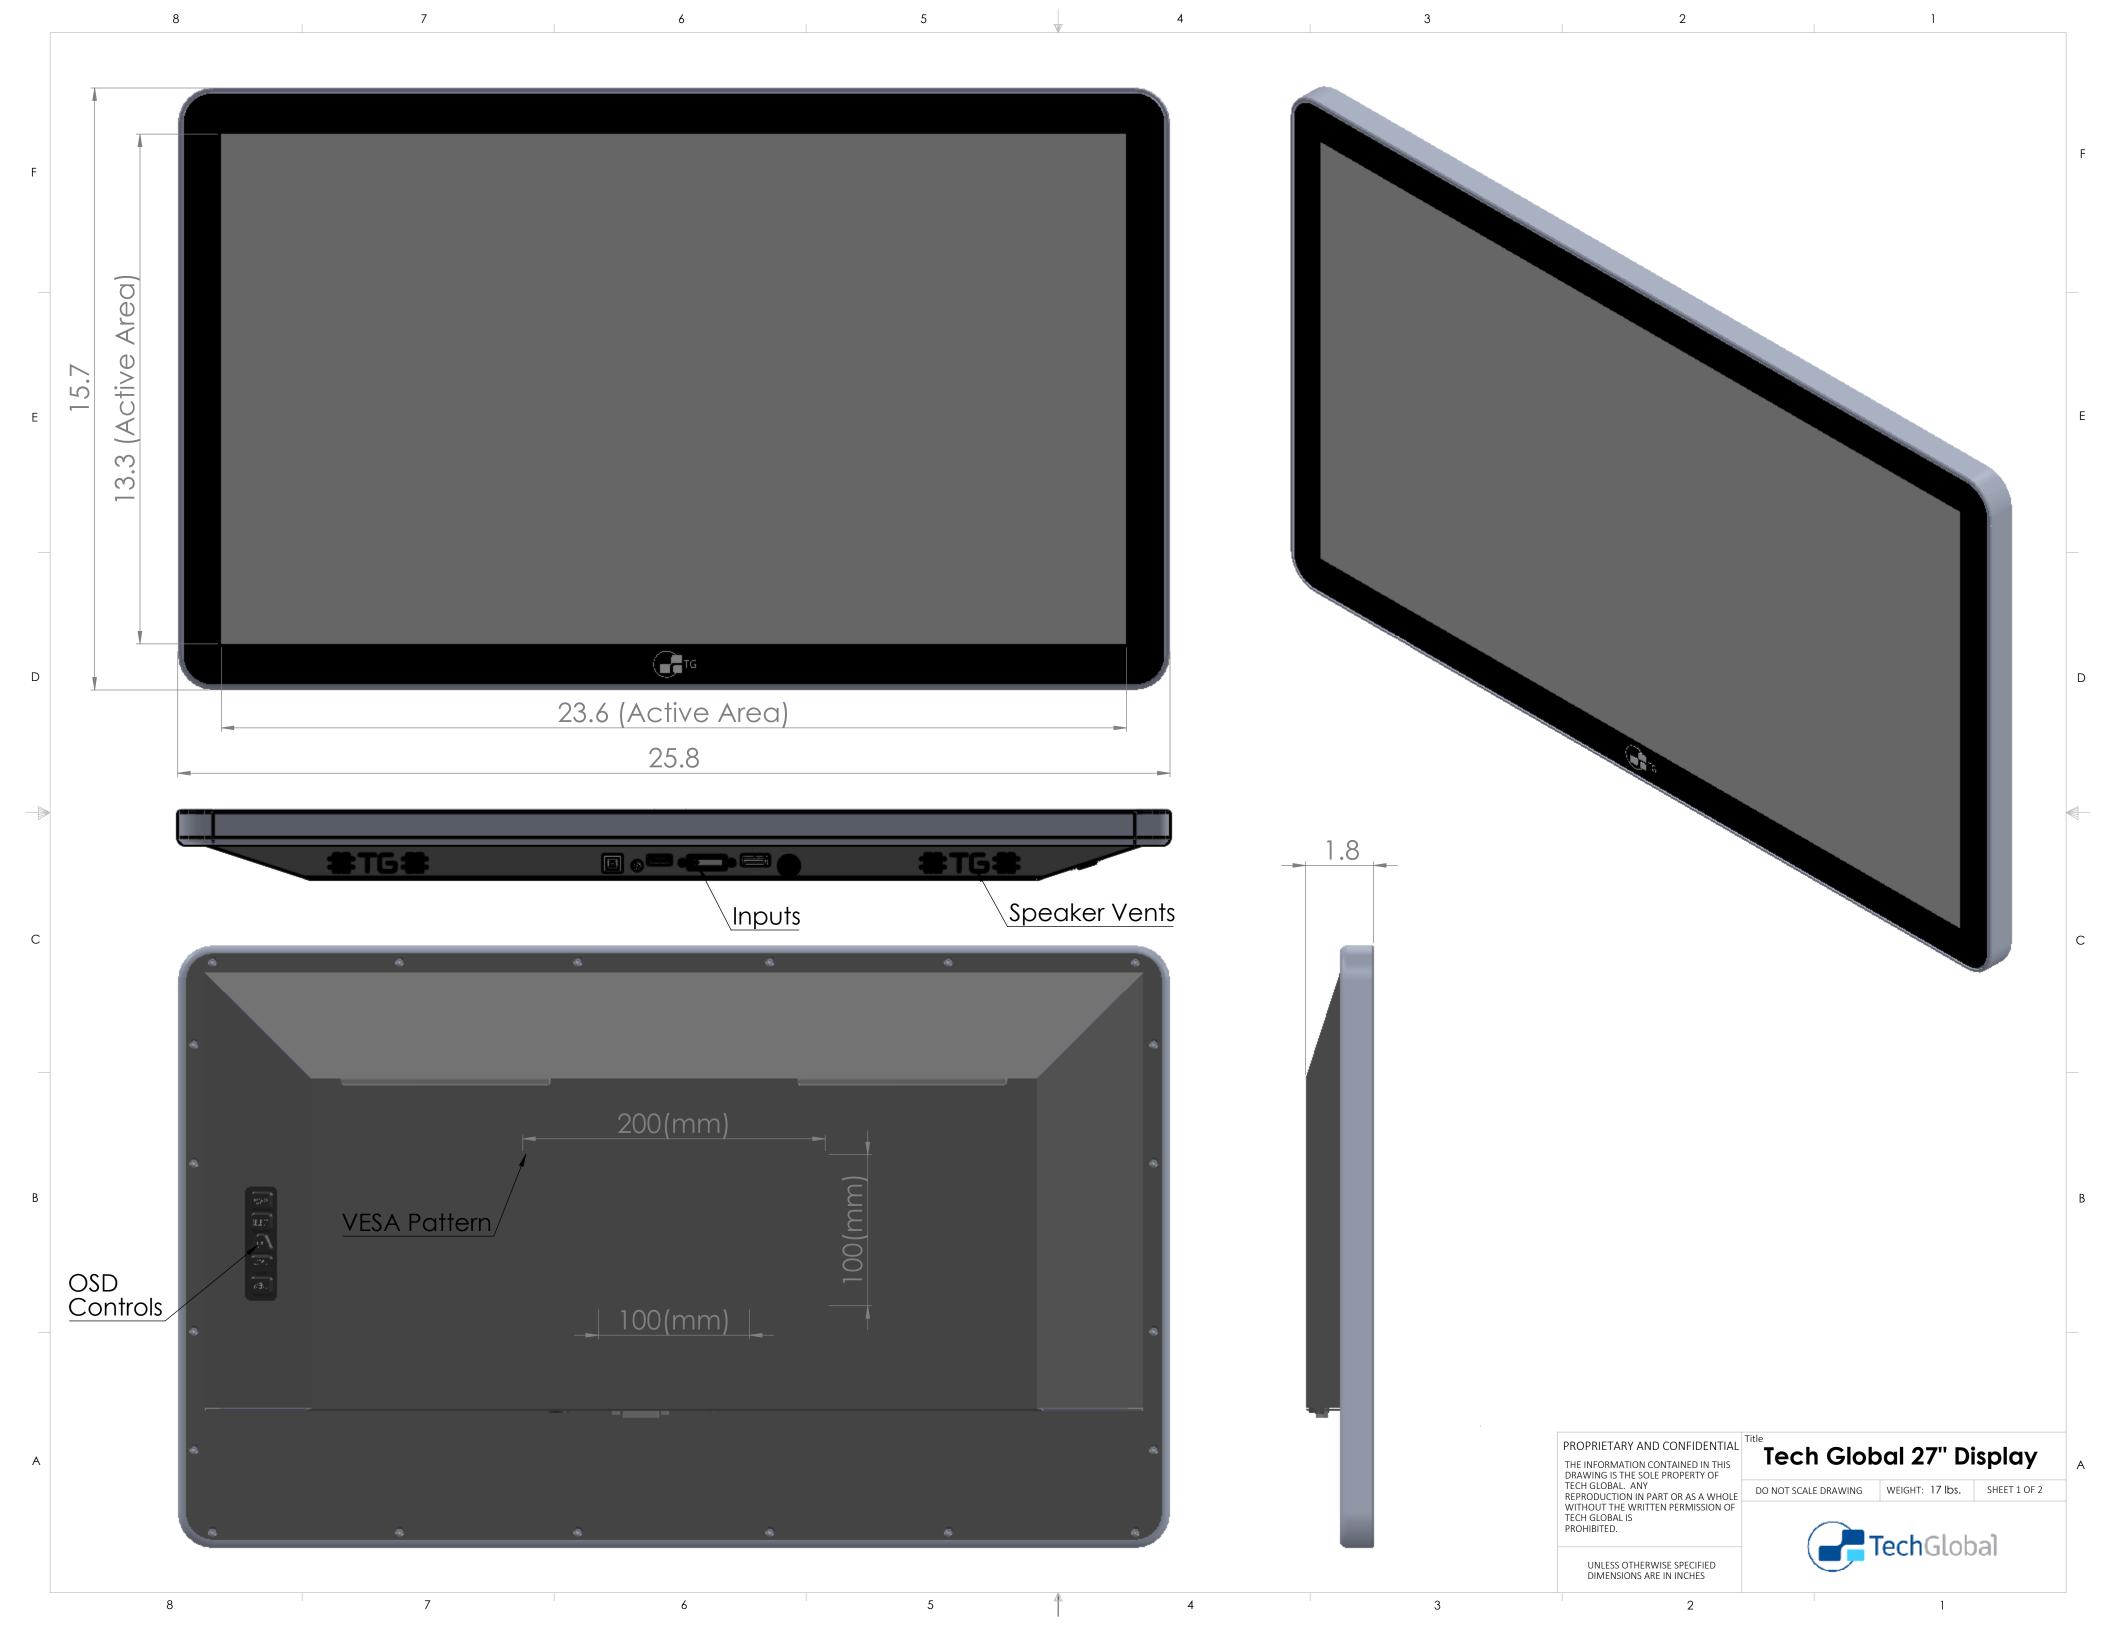


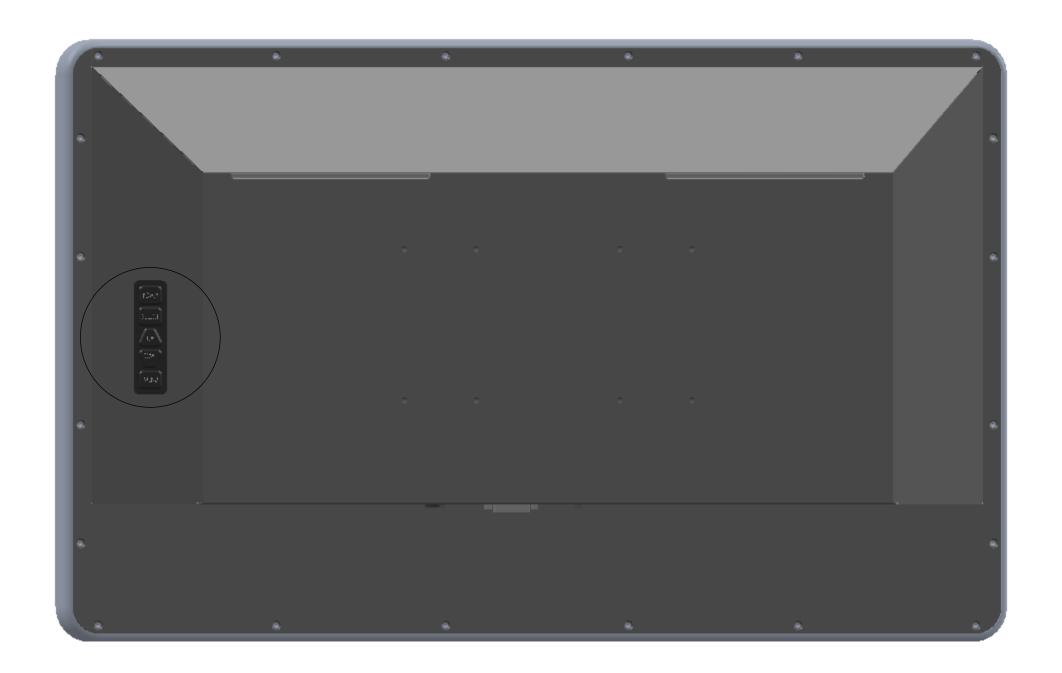

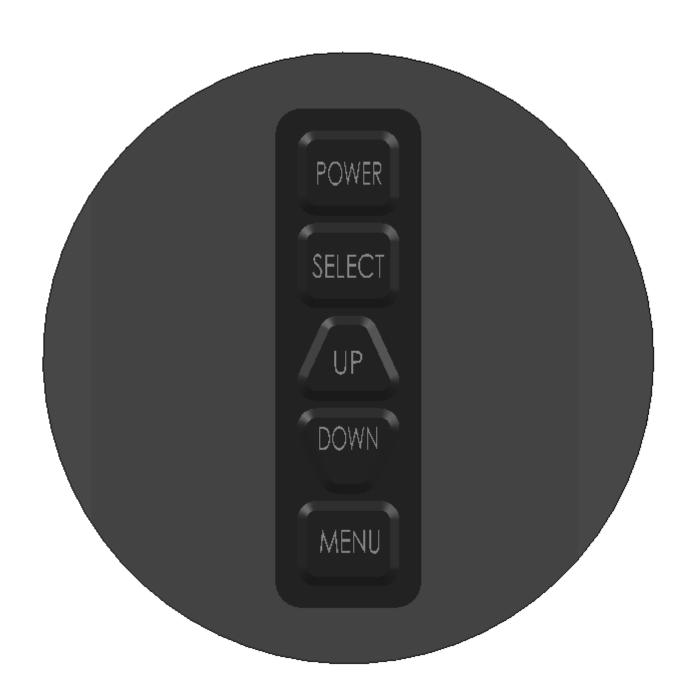


3



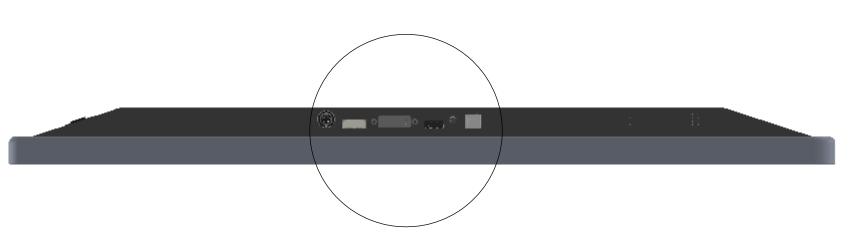

5

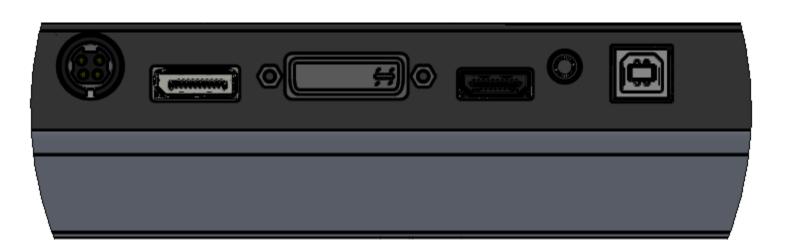

Inputs: DC Power, Display Port, DVI, HDMI, Audio In, USB Type B\* (As Seen Left To Right)

\*Touch Model Only

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TECH GLOBAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TECH GLOBAL IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

Tech Global 27" Display

DO NOT SCALE DRAWING WEIGHT: 17 lbs. SHEET 2 OF 2



7

6

5

3

2